




VORALUX™ HT 762
POLYOL

DIMENSIONS



PARAMETERS

- Ergonomics
- Elasticity
- Durability
- Support

Microclimate

- Temperature
- Humidity
- Freshness

Sensation

- Touch
- Imprint
- Travel



BENEFITS

An excellent energy absorber, VORALUX™ HT 762 inspires relaxing sleep across varying levels of firmness. This smart formula creates foam that moulds to the body, balances microclimate and eases pressure from pain points. Whether as a middle layer or a topper, it's a superior solution.

TYPICAL PROPERTIES

	Nominal Value	Unit	Test Method
Hydroxyl Number, as KOH	189.0 to 214.0	mg KOH/g	ASTM D4274
Viscosity (25°C)	255 to 325	cSt	ASTM D445
Water, max.	0.100	wt%	ASTM D4672

VISCOSITY vs. TEMPERATURE

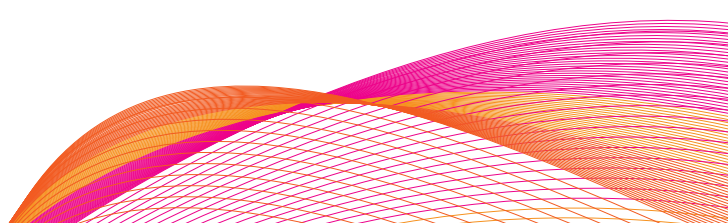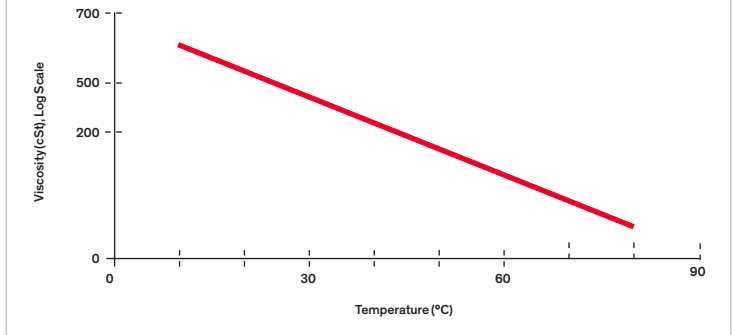




THERE'S MORE TO DISCOVER

At its very simplest, **ComfortScience** is how we develop and apply scientific knowledge to help people achieve comfort. But as you'll discover, there's much more to it than that.

Learn more at comfortscience.com

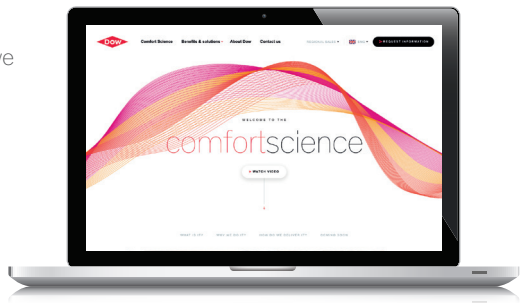

EXPLORE COMFORTSCIENCE

No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, the Customer is responsible for determining whether products and the information in this document are appropriate for the Customer's use and for ensuring that the Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Dow assumes no obligation or liability for the information in this document. No warranties are given; all implied warranties of merchantability or fitness for a particular purpose are expressly excluded. This document is intended for global use.